

STANDARD H2, INC.

A Delaware C Corp established in 2019 785 N. Freedom St., Unit B, Ravenna, OH 44266

What Makes Us Special?

We are a team of specialists dedicated to:

- Improving the quality-of-life using green chemistry to clean our air, water, and earth for healthful living by providing the technology needed for the H2 Economy.
- Promoting the installation of remote H2 Fueling Stations using Solar Panels, Wind Turbines, Hydroelectric Generators, etc. to electrolyze water and produce H2 on-site anywhere water and power are available.
- Convert the vast reserves of American methane into H2 to supply the USA and the world with ultra-clean fuel that is inexpensive by including the HC refining industry using DOE approved steam methane reforming.

Learn more here:

https://www.energy.gov/eere/fuelcells/hydrogen-production-natural-gas-reforming

We Created The SULFUR MAGNET™

The most tenacious inexpensive sorbent for cleaning

- Hydrogen, methane, and other fuel gases by removing H2S and other contaminants to produce hydrogen that is many times more pure than current World standards. This ultra-pure hydrogen would amplify the lifetime and efficiency of H2 Fuel Cells to magnify the Return On Investment of ownership.
- Air and other gases by removing volatile sulfur compounds, nitrogen oxides and many other odors down to low ppb, or even sub ppb concentrations.
- Water, both potable & waste, by removing sulfides and other pollutants such as reduction of PFAS forever chemicals.

Primary Sources of Hydrogen

Part 1: Electrolysis of Water

Fast, Convenient & No CO2 Pop-up Filling Stations: Electrolysis of Water

Powered by:

- Solar
- Wind
- Hydroelectric
- Nuclear

Advantages:

- Fast and easy to install where water and power are available
- Zero CO2 production

Disadvantages:

• Capacity limited by available water and power

Primary Sources of Hydrogen

Part 2: Steam Methane Reforming

Large Current Capacity Steam Methane Reforming at Petroleum Refineries

Powered by:

Natural Gas (Methane)

Advantages:

Years of use with a large capacity

Disadvantages:

- Transport of hydrogen is required
- CO2 may be produced during the process

Source:

DOE Hydrogen Production: Natural Gas Reforming

Primary Sources of Hydrogen

Part 3: Note about H2 Fuel Cells

Hydrogen from either source requires the H2 FINAL FILTER®

Our filter is packed with the SULFUR MAGNET™ and ensures the sulfur content of the hydrogen is below 1 ppb for optimal fuel cell efficiency and longevity as verified by an independent third party expert company that manufactures the standards used by automotive testing facilities.

The SULFUR MAGNETTM

- Is a family of patented inorganic compositions that can be freely transported as virgin or spent media with <u>no DOT restrictions</u> since impurities are trapped within the highly porous matrix of the odorless media and are chemically bound, not held like a sponge. The media can generally be reused after a low temperature regeneration process, or it can be recycled, or landfilled.
- is odor free.
- not water soluble.
- is highly concentrated with an unmatched capacity.
- functions over a very wide range of temperatures and pressures.
- available as powdered or granular media.

Volume of H2S That 1 Kg of SULFUR MAGNET™ Will Absorb at a Concentration

| 01: | | | |
|-----------------------|-----------------|---------------------|---------------|
| Concentration | Liters | Cubic meters | Cubic feet |
| | | | |
| 1,000 ppm | 282,000 | 282 | 9,959 |
| 100 ppm | 2,820,000 | 2,820 | 99,587 |
| 10 ppm | 28,200,000 | 28,200 | 995,874 |
| Typical natural gas 4 | | | |
| ppm | 70,500,000 | 70,500 | 2,489,684 |
| 1 ppm | 282,000,000 | 282,000 | 9,958,736 |
| 100 ppb | 2,820,000,000 | 2,820,000 | 99,587,360 |
| 10 ppb | 28,200,000,000 | 28,200,000 | 995,873,601 |
| Current standard 4 | 70,500,000,000 | 70,500,000 | 2,489,684,002 |
| 1 ppb | 282,000,000,000 | 282,000,000 | 9,958,736,009 |




H2 FINAL FILTER, INC.

A Delaware C Corp and wholly owned subsidiary of Standard H2, Inc. 785 N. Freedom St., Unit B, Ravenna OH 44266

H2 FINAL FILTER®

Stainless steel 316 housing

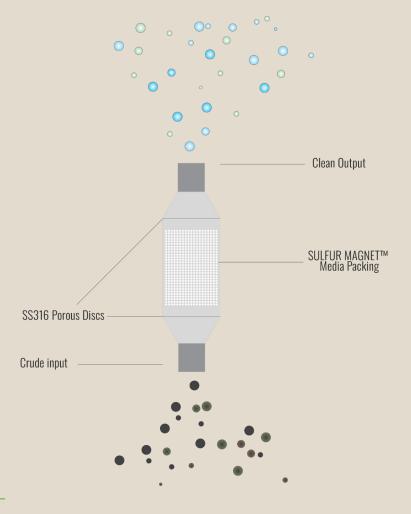

Filtering the 4 Gases of a Gas Chromatograph




Filter Data Full Summary



| Sample Point | Accumulated Volume | Influent Concentration in mg/L | Effluent Concentration in mg/L | Hydrogen Sulfide % Reduction |
|-----------------|-----------------------|--------------------------------------|--------------------------------------|------------------------------------|
| 10 UV | 10 UV | 1.121 | 0.002 | 99.87% |
| 20% | 3000 gallons | 1.053 | 0.002 | 99.78% |
| 40% | 6000 gallons | 1.134 | 0.005 | 99.55% |
| 60% | 9000 gallons | 1.107 | 0.007 | 99.34% |
| 80% | 12000 gallons | 1.093 | 0.015 | 98.60% |
| 100% | 15000 gallons | 1.014 | 0.020 | 98.00% |
| 120% | 18,000 gallons | 1.036 | 0.028 | 97.34% |
| 140% | 21,000 gallons | 1.108 | 0.031 | 97.23% |
| 160% | 24,000 gallons | 1.057 | 0.039 | 96.30% |
| 180% | 27,000 gallons | 1.083 | 0.047 | 95.65% |
| 200% | 30,000 gallons | 1.157 | 0.055 | 95.24% |

SULFUR MAGNET™ H2S Reduction Visualized

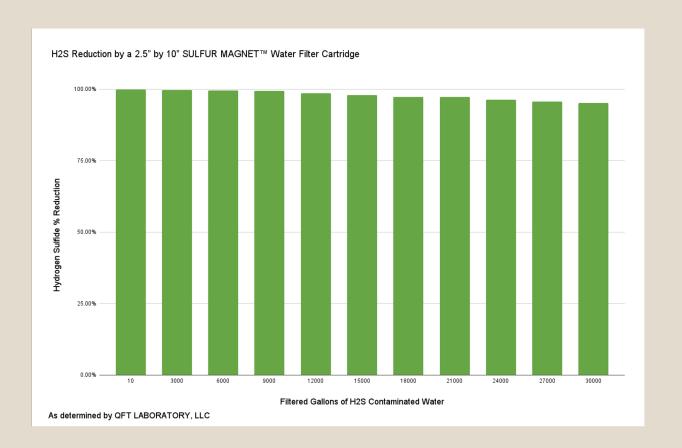

Protect the heat exchanger and the heating equipment




Agriculture and the SULFUR MAGNET™

Eliminates Harmful Contaminants:


• Removes unpleasant odors like skunk spray, urine, feces, hydrogen sulfide (H_2S) , ammonia, and many others.

Application Methods:

- Powder Form: Apply with a rose duster for immediate odor elimination in areas like equestrian training arenas and garbage containers.
- Fine Granular Form: Use for long-term odor control.



- 100% organic compound free
- Anti-microbial and Anti-Fungal
- Not affected by freezing temperatures
- Unaffected by high heat to over 500°F
- Not affected by humidity
- Odor free and insoluble in water
- Suitable for landfill disposal



- Effective for reducing chlorine
- Effective for reducing bromine
- Effective for reducing fluorine
- Effective for reducing iodine
- Recyclable & Regenerable for reuse

